





*The Wireless Intercom*

# User & Installation Guide



# What's in the box?





<p><b>1x</b></p>  <p><b>CONNECTA SPEECH PANEL</b></p>	<p><b>1x</b></p>  <p><b>CONNECTA HANDSET</b></p>	<p><b>1x</b></p>  <p><b>HANDSET CHARGING DOCK</b></p>	<p><b>1x</b></p>  <p><b>TRANSFORMER PLUG FOR SPEECH PANEL</b></p>
--	---	--	--

<p><b>1x</b></p>  <p><b>SCREWDRIVER BIT</b></p>	<p><b>4x</b></p>  <p><b>SECURITY RAWLPLUGS</b></p>	<p><b>1x</b></p>  <p><b>TRANSFORMER PLUG FOR HANDSET CHARGING DOCK</b></p>	<p><b>2x</b></p>  <p><b>AAA BATTERIES</b></p>
--	---	---	--



# Features



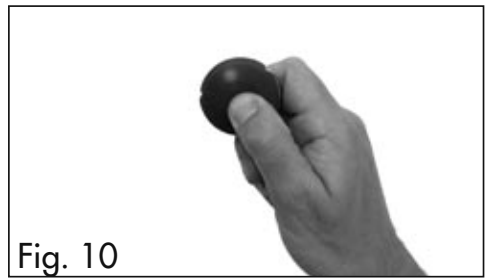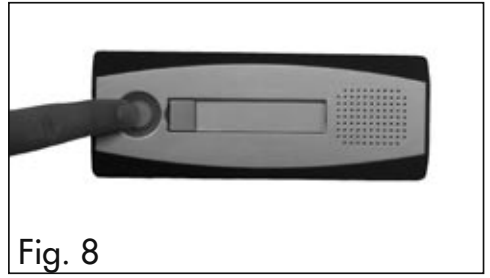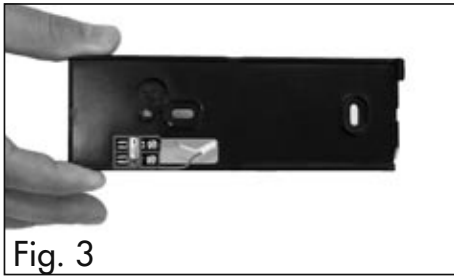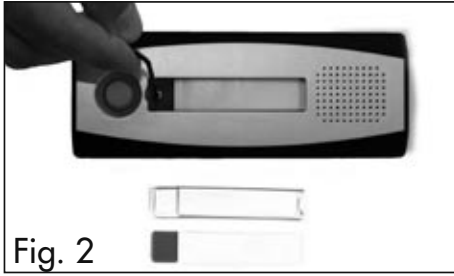

# ERA Locca Connecta User Guide

## **The intercom system can be used in one of three ways:**

1. As a standalone system that enables users to communicate with visitors at the entrance of a property.
2. To connect to other rooms in the office or home.
3. As above, but in conjunction with a ERA Locca access control system (ERA Locca Access or Multi) to operate door locks, barriers and gates.

## **INSTALLING THE SPEECH PANEL**

### **The speech panel can be powered by:**

1. 1A Power plug (supplied with the system).
2. Any ERA Locca access control product (ERA Locca Access or Multi).  
(Please note: if using the ERA Locca Access or Multi you need to use the 1A power supply to power these receivers).
3. Any 12V external power supply (up to 3A).

### **Removing the mounting plate**

1. With the Connecta panel facing you, push the clear plastic nameplate cover to the right and lift it out. **Fig.1**
2. Beneath the nameplate cover is a plastic nameplate, remove this to reveal the security screw.
3. Using the special driver piece (provided in packaging), undo the security screw. **Fig.2**

### **Attach the wiring to mounting plate:**

1. Run the wiring through the holes in the mounting plate and attach to the back of the speech panel. **Fig.3 & 4**
2. Attach the mounting plate to the wall using screws and rawl plugs provided.

### **Re-attach the speech panel to the mounting plate:**

1. Securely attach the speech panel back to the mounting plate with the security screw, using the special driver piece.
2. Replace the name plate and nameplate cover.

**The ERA Locca Connecta is now installed.**

## **INSTALLING THE HANDSET & CHARGING DOCK**

1. Place the charging cradle on flat surface or rotate the base and attach to wall.
2. Plug charger into the base of charging cradle. **Fig.5**
3. Plug in to socket.
4. Open back of handset and insert rechargeable batteries (included in pack). **Fig.6**
5. Place handset on charging cradle. **Fig.7**
6. Your handset is now installed.

## **PROGRAMMING EXTRA HANDSETS INTO THE ERA LOCCA CONNECTA**

(Please note: the handset supplied is already programmed to the speech panel)

1. Please note - rechargeable batteries should be inserted into handset.
2. Hold down the 'call' button on the speech panel (for around 5 seconds) until the button/nameplate backlight flashes once. **Fig.8**
3. Once the call button/nameplate light has flashed, press the 'call' button once, and then a second time. The nameplate light should now begin flashing.
4. Take the first handset and press and hold the open button for five seconds until the handset emits a short beep.
5. Press the open button for a second time. The light on the front of the handset will go red and the handset will begin beeping.
6. The system will now automatically log the handset into the speech panel. This can take up to 60 seconds.
7. To enter further handsets, please repeat the above process with each handset (up to a total of six).

## **OTHER FEATURES**

### **Turn on/off backlight on speech panel**

1. Hold down the 'call' button on the speech panel until the button/nameplate flashes.
2. Press the 'call' button for a further five seconds until the speech panel beeps.
3. The speech panel backlight will turn on/off.

## Deleting handsets from speech panel

1. Turn off power to speech panel.
2. Hold down call button.
3. Turn on power to speech panel.
4. Release call button.
5. All handsets will now be deleted.

## Paging other phones

1. Press talk on the handset.
2. All other handsets will ring (different tone).

## PROGRAMMING HANDSETS TO WORK WITH AN ERA LOCCA ACCESS OR MULTI To programme handsets into the ERA Locca Access or Multi, take the following simple steps:

1. Press the 'call' button on the speech panel.
2. The handset will ring. Press the 'talk' button on the handset. The handset and speech panel are now connected.
3. Put the ERA Locca Access or Multi into 'learn key' mode.

[for the ERA Locca Access- press the red programming key twice] **Fig.9**

[for the ERA Locca Multi- press the red programming key once, scroll to 'Add Key' option, then press the red programming key again] **Fig.10**

Refer to the Locca Access or Multi user manual if necessary.

4. Press the 'open' button on the handset twice.
5. The ERA Locca Access or Multi will acknowledge safe learning of the handset.
6. Repeat this process (from step one) for each new handset.

## To unlock the door

1. Press 'Talk' on the handset.
2. Then press 'Open'.

(this is a security feature to ensure you do not unlock the door by mistake).

## GUARANTEE

Your ERA Locca system comes with a free one-year guarantee (from date of purchase) against mechanical defects.

## IMPORTANT

The user should not attempt to service the unit or open the main casing.

## TECHNICAL INFORMATION:

### Handset:

- Operating range up to 200 metres line of sight in open area
- Ambient temperature range: 0° to 40°
- Environment humidity: 80% RH
- Adaptor Supply: 6Vdc 200mA
- First charging time for rechargeable batteries: 12 hours
- Use Locca adaptor with band Ktec and model number: KA23D060020033K
- Use only GP rechargeable batteries, with model number: GN60AAAHC. [2 X 1.2V 600mAh Ni-MH].

### Caution

Risk of explosion if battery is replaced by incorrect type. Dispose of used batteries according to instructions.

### Speech Panel:

- Ambient Temperature range: -20° to 55°
- Environment humidity: 95% RH
- IP Rating: IP54
- For use with Locca adaptor (model number: WT5-067R) or other adaptor supply: Adaptor Supply: 12Vdc 1A

## CE

Hereby, Locca Tech Ltd, declare that this Locca Connecta System is in compliance with the essential requirements and other relevant provisions or Directive 1999/5/EC.

**TECHNICAL HELPLINE**  
**01922 490 050**

