

CONTINUOUS KEEP

FEATURES & BENEFITS

The Continuous keep is a simple, fast fit solution replacing a suite of keeps with one single length accommodating all locking points. It offers...

- reduced fabricator errors
- reduced fitting time
- improved aesthetics and
- perceived strength

Designed to meet the requirements of PAS 23 and PAS 24, the continuous keep is fully adjustable and is suitable for a wide range of door profiles. Manufactured to suit three euro groove positions (9mm, 13mm and 16.5mm) allows the keep to sit close to the front face of the outer frame. This gives unobstructed latching, clean lines and improves the strength significantly on certain systems.

All keeps have been designed to accept a variable compression adjustment of $\pm 2\text{mm}$. Compression adjustment can be made when the keep is fully fitted and installed, by loosening the two screws at each adjustment point.

Manufactured from high quality mild steel, passivated for exceptional corrosion resistance. The latch and roller plates are bright chrome plated die-castings, providing a hard surface minimising wear and brings a bright contrast to the product.

The bar is supplied fully assembled with profile related packers attached with end caps and dust pockets for ease of installation.

Suitable for:

- 2 Hook 2 Roller MPL options
- 2 Hook 4 Roller MPL options
- 3 Hook 2 Roller MPL options

TECHNICAL INFORMATION

Corrosion resistance:	Plated to BS EN 1670 Grade 4
Operation:	Function tested

MATERIALS

Keep bar:	Steel BZP CR3 Passivate + Seal
Latch and roller plates:	Chrome plated


MECHANICAL

Adjustment:	$\pm 2\text{mm}$ Compression
Handing:	Left and right hand

PART NUMBERS

Numerous profile related keeps available - For latest list contact mcope@erasecurity.com

Diagram illustrates right hand 2 hook 2 roller MPL keep. Not to scale.

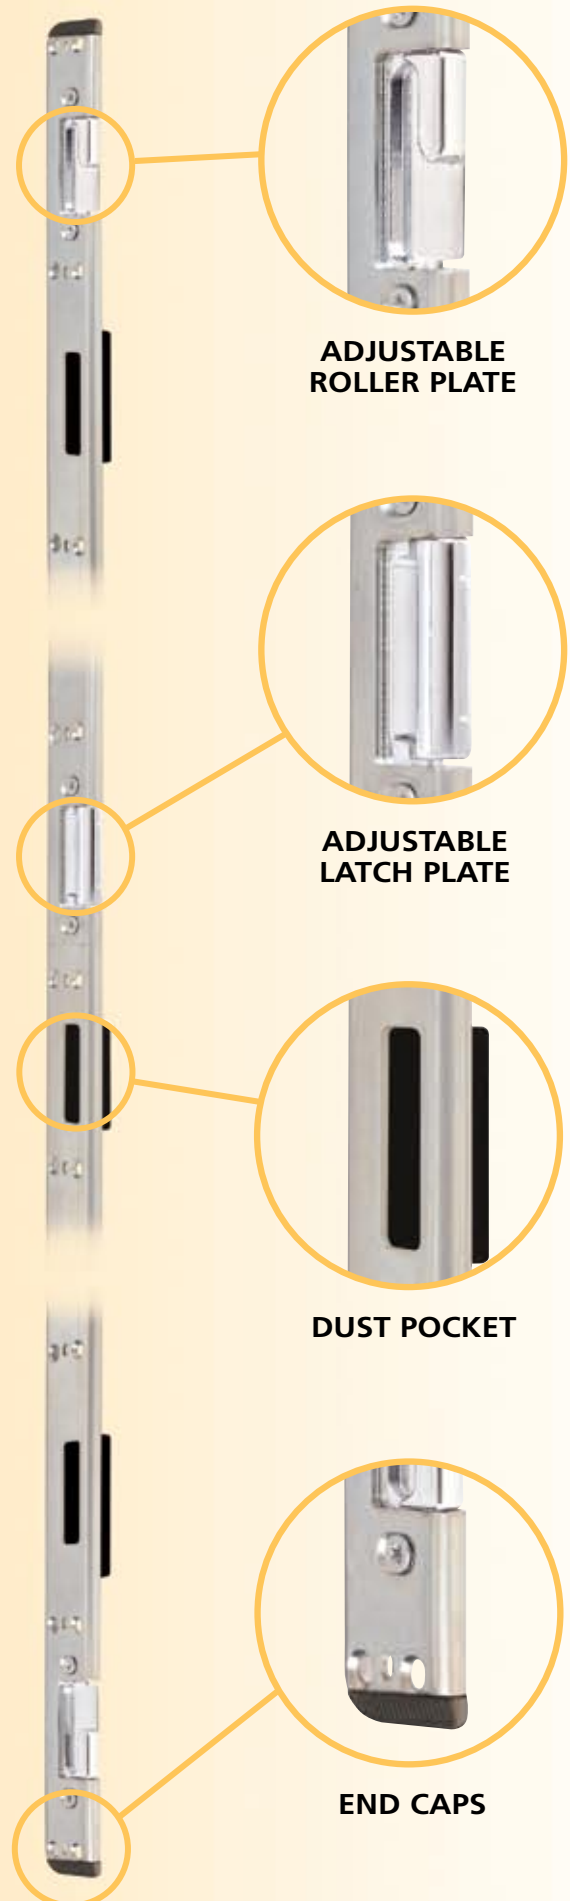

The Door Lock People