


MULTIPOINT LOCKING SYSTEM

FRENCH DOOR LOCKING SYSTEM

FEATURES & BENEFITS

- 10 Year Guarantee
- Available as 45mm Backset
- Suitable for securing flush French timber doors
- Master lock securley engages into slave mechanism, automatically deadlocking a slave unit once operated
- No need for false (dummy) mullion
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on master lock
- Central brass deadbolt throws 22mm to prevent unauthorised entry
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with all BS and DIN specification cylinders and most other types of cylinder)
- Split spindle for lever/pad applications - choice of length available
- Bi-directional throw of locking features - enhanced anti-jemmy feature
- Twin high security forged brass hooks for anti-separation resistance - 10mm (maximum) engage into slave lock
- Hooks deadlocked in the fully thrown position
- Full range of keeps available
- Optional shoot bolt engagement for additional security

LOCKING MECHANISM

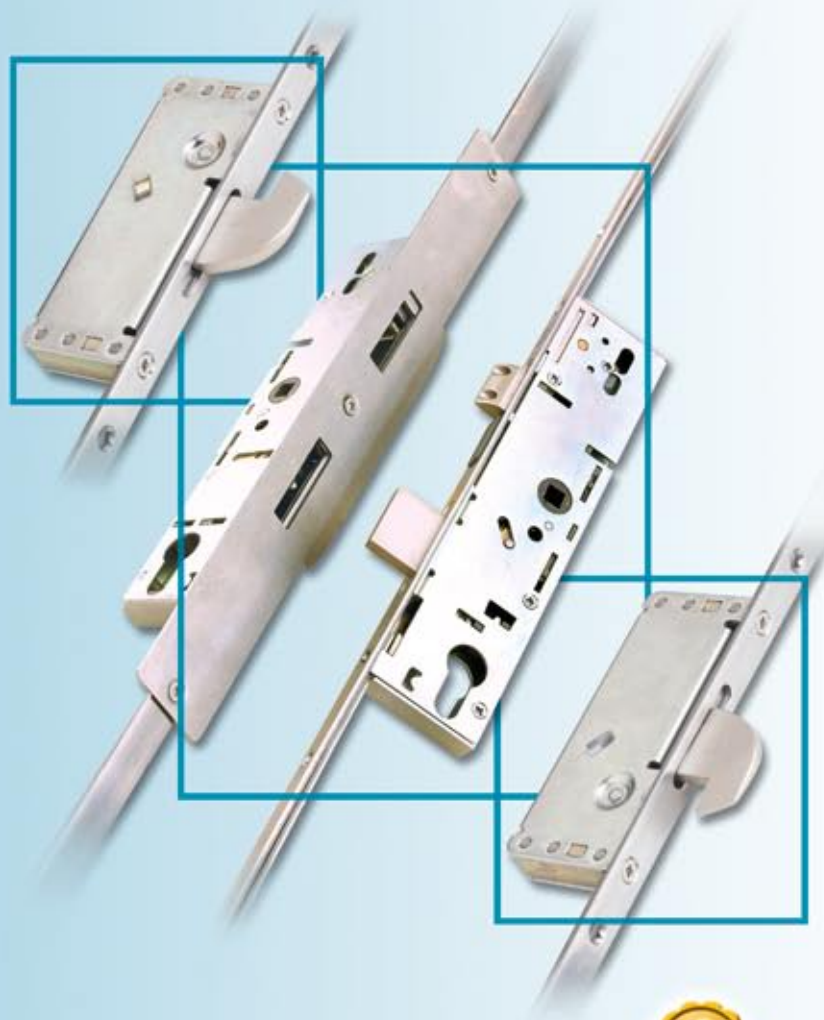

CENTRE KEEP



SHOOT BOLT (OPTIONAL)



10 YEAR GUARANTEE



FORCE RESISTANT



CORROSION RESISTANT




VARIETY OF EURO PROFILE CYLINDERS



ALTERNATIVE SPINDLE LENGTHS



The Door Lock People

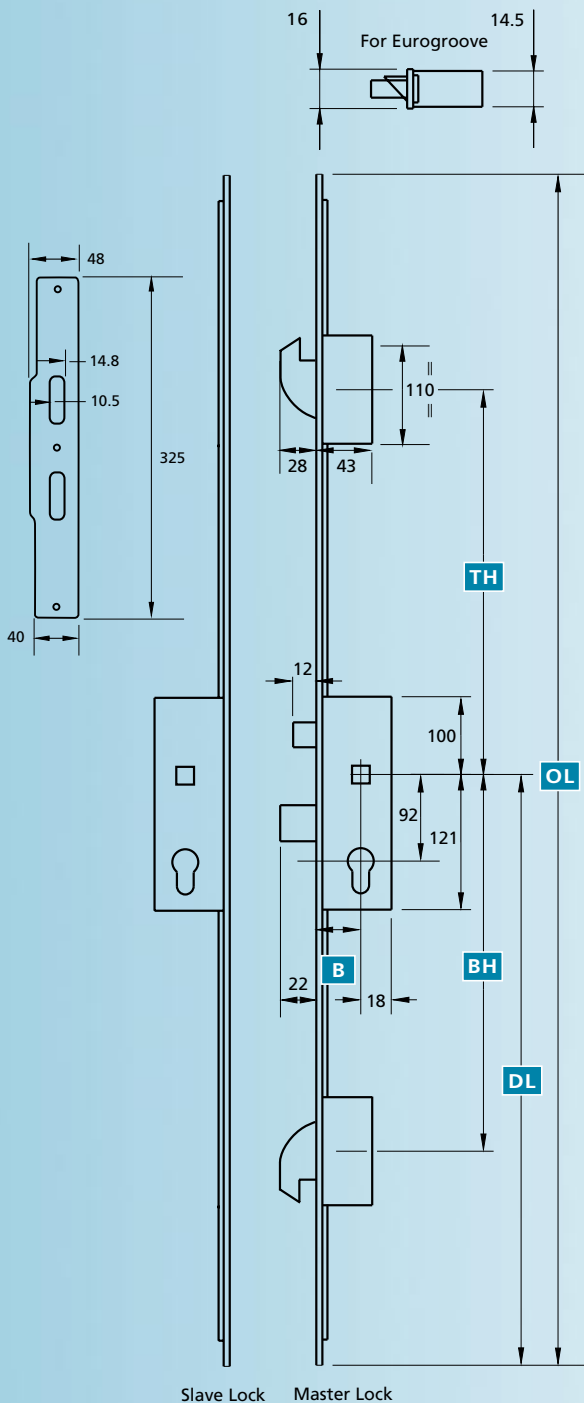

KEY

B	Backset	OL	Overall Length	TH	Top Hook
DL	Datum Line	BH	Bottom Hook		

OPTION 1 (MASTER LOCK)

B	DL	OL	TH	BH	Part No.	Box Qty
45	1050	1946	376	495	7145-1134-79	5

OPTION 2 (SLAVE LOCK)

B	DL	OL	TH	BH	Part No.	Box Qty
45	1050	1946	376	495	7545-1135-79	5

KEEPS

Description	Part No.	Box Qty
Double Shoot Bolt Keep	5404-85	50
Non-Adjustable Center Keep	2743-77	"

OPTIONAL EXTRAS

Suitable for options 1 & 2 above

B	SHOOT BOLT	MAINTENANCE
45	•	

• Available - See pages 14 - 15 for more details

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

TECHNICAL INFORMATION

Corrosion resistance:	Plated to BS EN 1670 Grade 4
Operation:	Function test 100,000 cycles

MATERIALS

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	SS430
Hooks and dead/sash bolt:	Forged brass satin chrome plate
Center Strike:	Steel Polished Chrome

Diagram illustrates product in locked position.
Not to scale.

All dimensions are in mm and are nominal.
ERA Products reserves the right to change specification without notice.