

# EURO-SECURE CYLINDER GUARD

The Euro-Secure cylinder clamp has been designed to prevent forced external entry by securing the profile locking cylinder to the door frame.

The clamp is positioned with the aid of a setting block and secured to the locking cylinder by two grub screws.

The cylinder is re-positioned within the lock and the clamp secured in place by fixing bolts drilled through the door.

For PVC-u doors a fixing jig is available to ensure that the hardened steel bolts are aligned correctly with the clamp.

Designed to meet the latest security amendments to PAS 023/024, the device will prevent forced external entry through the removal of the profile cylinder by securing it to the door.

The Euro-Secure cylinder clamp is a practical solution that can be retrospectively fitted to most euro-cylinders and which will substantially improve the security of most doors.



## Technical information


<b>Corrosion resistance:</b>	Meets the Requirements of BS EN 1670:2007 Grade 4
<b>Operation:</b>	Security tested to meet the requirements of proposed amendment Draft G - PAS023/024

## Material specification

<b>Cylinder clamp:</b>	Composite Doors – Extruded Aluminium 12mm deep PVC-u Doors – Extruded Aluminium 18mm deep Zinc Alloy casting BS EN 12844:1999 13mm deep
<b>Bolts:</b>	Composite Doors – 8mm diameter high tensile steel 41mm long PVC-u Doors – 8mm diameter high tensile steel 59mm long 6mm diameter high tensile steel 50mm long x2
<b>Grub screws:</b>	Black carbon steel 2mm
<b>Setting Block:</b>	Zinc alloy casting

## Product Options

Available in a choice of three depths – 12mm for Composite doors and 18mm and 13mm for PVC-u doors. 12mm double version also available. See opposite for complete list of product codes.

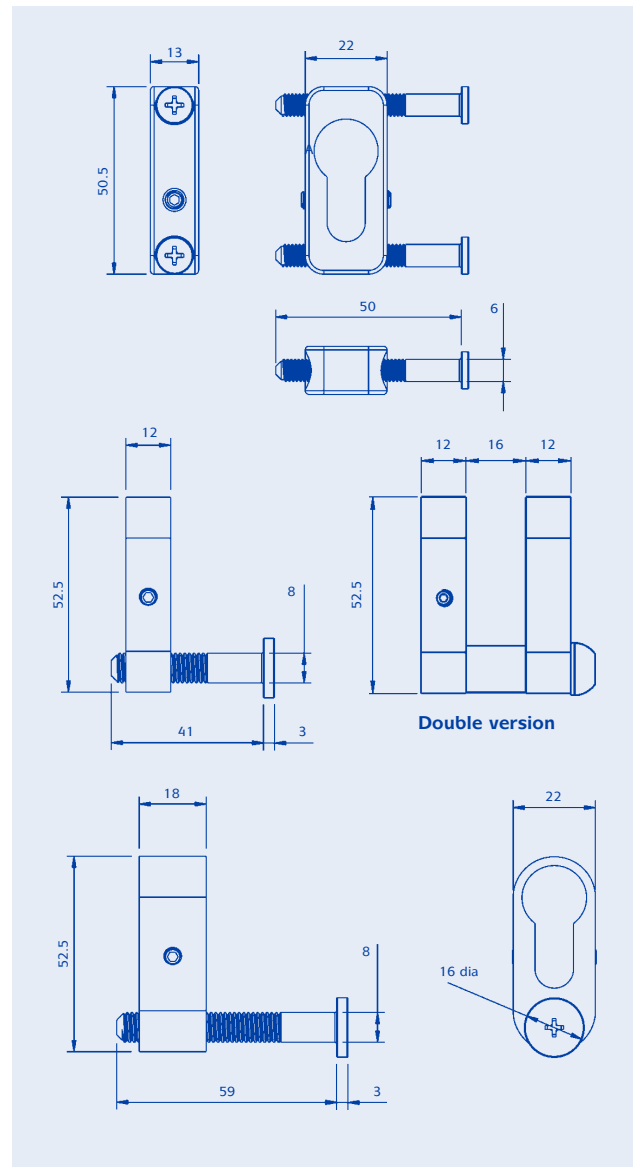

Construction Products Association  
Innovation & Achievement Award 2006

# EURO-SECURE CYLINDER GUARD

## Part numbers

Euro-Secure Cylinder Clamp		Double
12mm – Composite door	DCLSCO0004A	DCLSCO0009
18mm – PVC-u door	DCLSCO0005A	
13mm – PVC-u door (remedials)	DCLSCO0007A	
Setting block	DCLSXO0001	

## Fixing Jig

DCLSJO0001

## Packing information

Boxed in 20's in an outer box of 240 pieces.

Allen key not supplied.