

FEATURES & BENEFITS


LOCK

- The repair lock is designed to replace most multi point locks in the UK market where a replacement lock is not available
- Designed for PVCu doors and frames
- Lock fits conventional 16mm wide Euro groove, with 35mm backset
- Non-handed lock mechanism with reversible sash bolt. Split spindle for lever pad applications
- Lock uses a traditional euro key cylinder, existing cylinder can be re-used if in good condition
- Lock will fit most routed preparations, but some trimming may be needed in some applications
- Lock uses conventional adjustable rollers for enhanced performance and weather sealing
- Lock uses high tensile steel mushrooms for anti-separation with adjustable keep plates
- Mushrooms can be shimmed to suit different air gap dimensions depending on applications (patented product)
- Lock can be cut-to-length to suit a wide range of door heights


KEEP

- Keep strip conceals previous installation holes and does not use original hardware and fixings
- Keep strip packers are universal and are adjustable on site to suit the door frame profile (patented product)
- Keep strip is none handed and suitable for swing in/out designs
- Keep is adjustable for seal compression/door distortion
- Lock and keep are corrosion protected to latest international specifications
- Package is supplied with all fixings and illustrated instructions for full installation

LOCKING MECHANISM

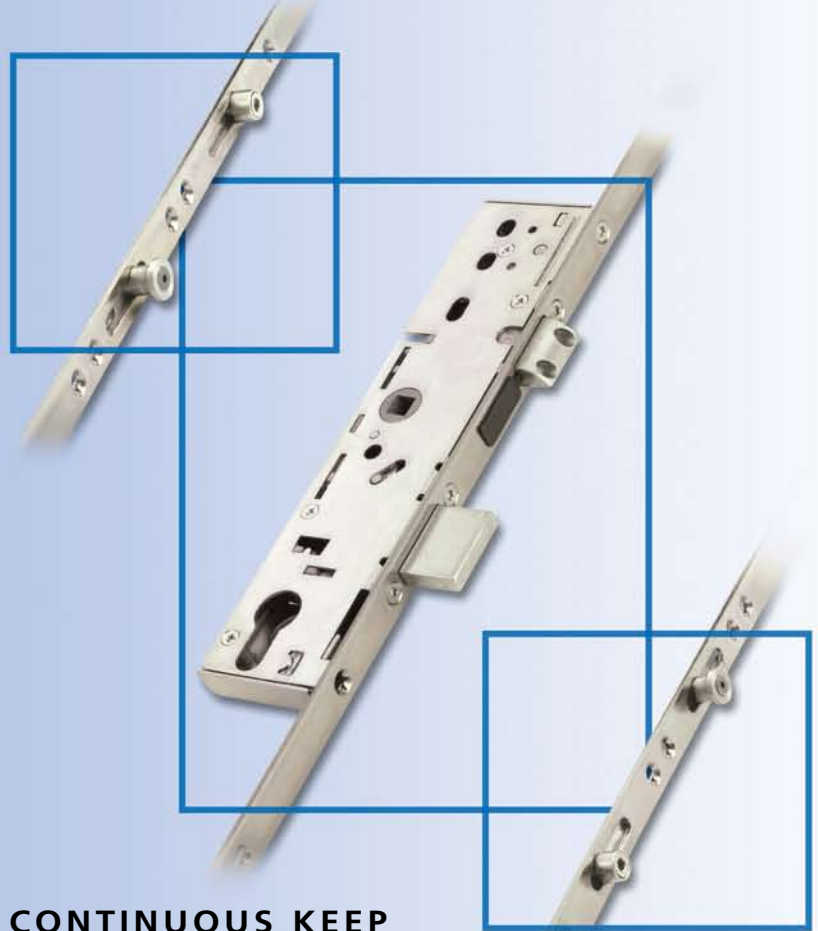

CONTINUOUS KEEP

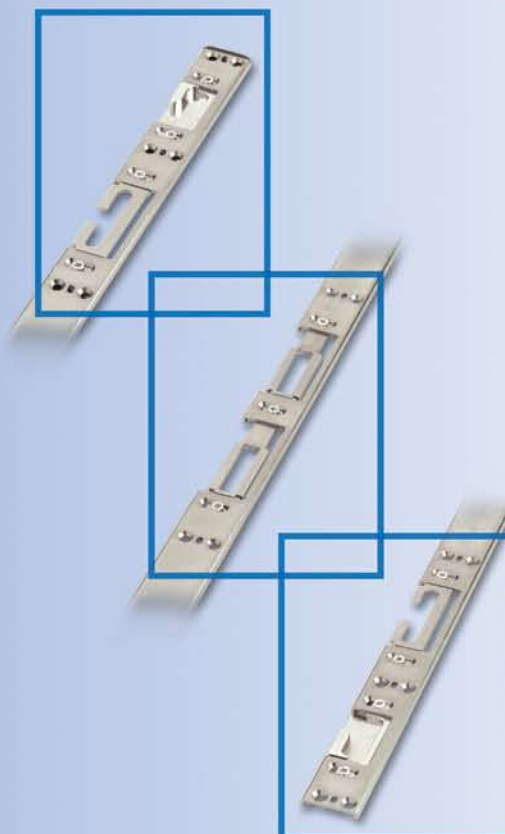

10 YEAR GUARANTEE



CORROSION RESISTANT



VARIETY OF EURO PROFILE CYLINDERS



ALTERNATIVE SPINDLE LENGTHS

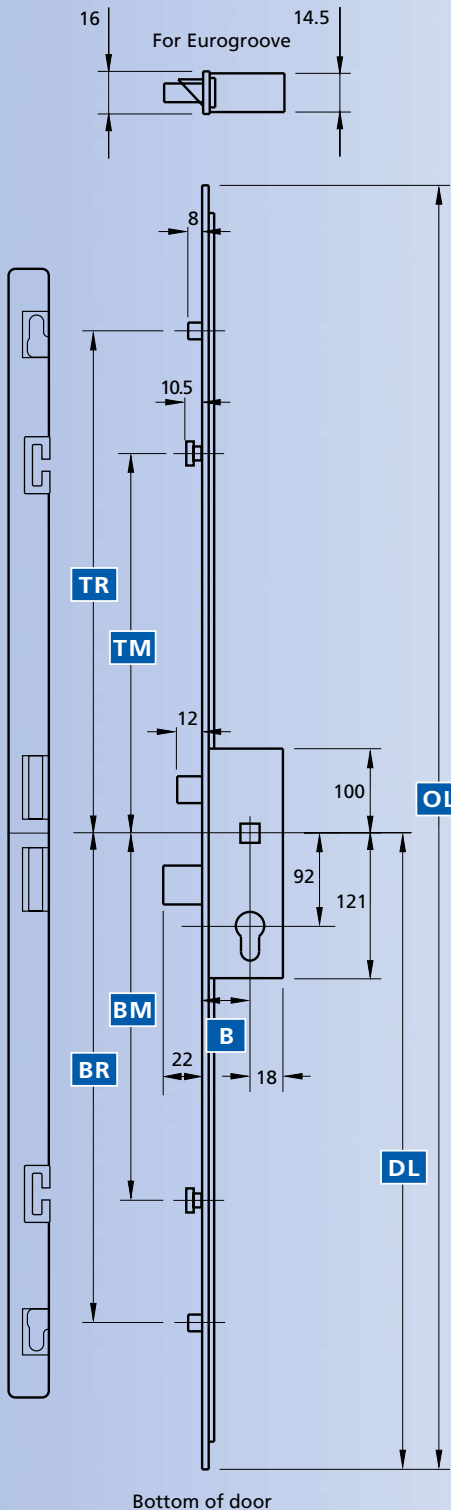


Diagram illustrates product in locked position.
Not to scale.

All dimensions are in mm and are nominal.
ERA Products reserves the right to change specification without notice.

KEY

B	Backset	TM	Top Mushroom
DL	Datum Line	BR	Bottom Roller
OL	Overall Length	BM	Bottom Mushroom
TR	Top Roller		



MAINTENANCE

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

OPTION 1

B	DL	OL	TR	TM	BR	BM	Part No.	Box Qty
35	1050	2250	716	619	714	619	6135-Repair Kit	5

OPTIONAL EXTRAS

EURO CYLINDERS	DOOR HANDLES
	

See page 31 for further details of cylinders and handles

TECHNICAL INFORMATION

Corrosion resistance:	Plated to BS EN 1670 Grade 4
Operation:	Function test 100,000 cycles

MATERIALS

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	Steel BZP CR3 Passivate + Seal
Dead/sash bolt:	Forged brass satin chrome plate
Rollers/Mushrooms:	Steel BZP CR3 Passivate + Seal
Keep:	Steel BZP CR3 Passivate + Seal

MERCHANDISING STAND

Stand dimensions:
Height: 2.3m
Width: 0.4m
Depth: 0.5m

