


# MULTIPOINT LOCKING SYSTEM

## FRENCH DOOR LOCKING SYSTEM

### FEATURES & BENEFITS

- 10 Year Guarantee
- Available as 45mm Backset
- Suitable for securing flush French timber doors
- Master lock securley engages into slave mechanism, automatically deadlocking a slave unit once operated
- No need for false (dummy) mullion
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on master lock
- Central brass deadbolt throws 22mm to prevent unauthorised entry
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with all BS and DIN specification cylinders and most other types of cylinder)
- Split spindle for lever/pad applications - choice of length available
- Bi-directional throw of locking features - enhanced anti-jemmy feature
- Twin high security forged brass hooks for anti-separation resistance - 10mm (maximum) engage into slave lock
- Hooks deadlocked in the fully thrown position
- Full range of keeps available
- Optional shoot bolt engagement for additional security

### LOCKING MECHANISM

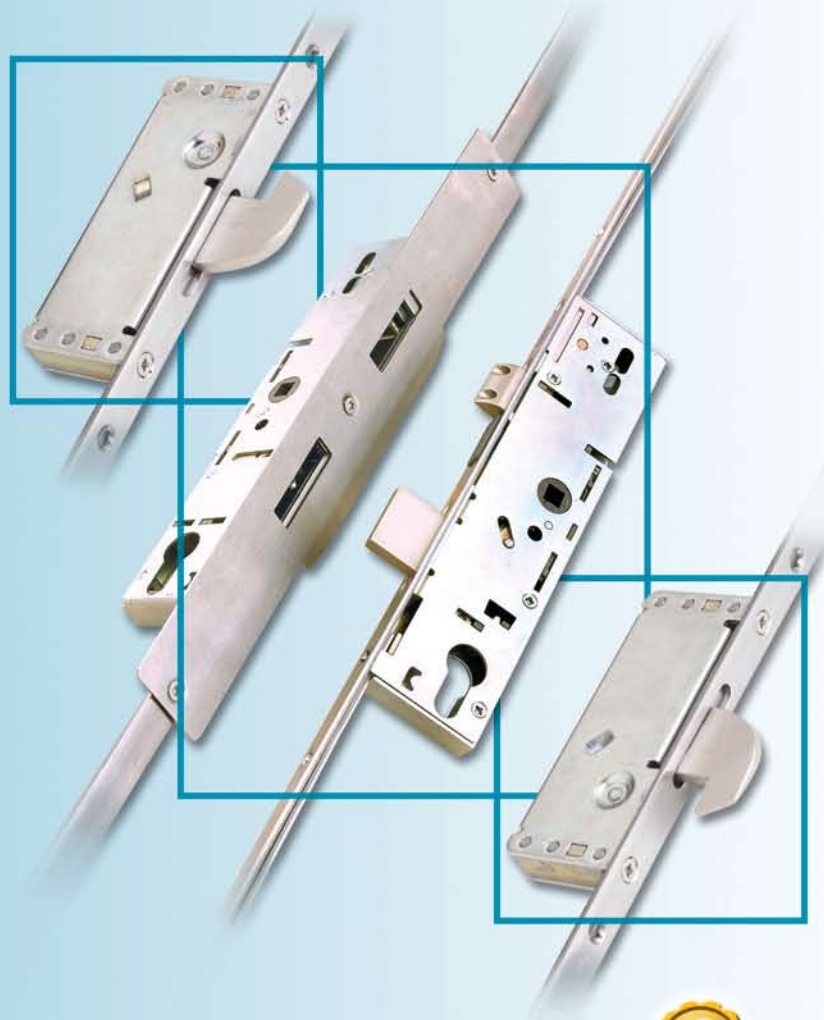

### CENTRE KEEP



### SHOOT BOLT (OPTIONAL)



10 YEAR GUARANTEE



FORCE RESISTANT



CORROSION RESISTANT




VARIETY OF EURO PROFILE CYLINDERS



ALTERNATIVE SPINDLE LENGTHS



*The Door Lock People*

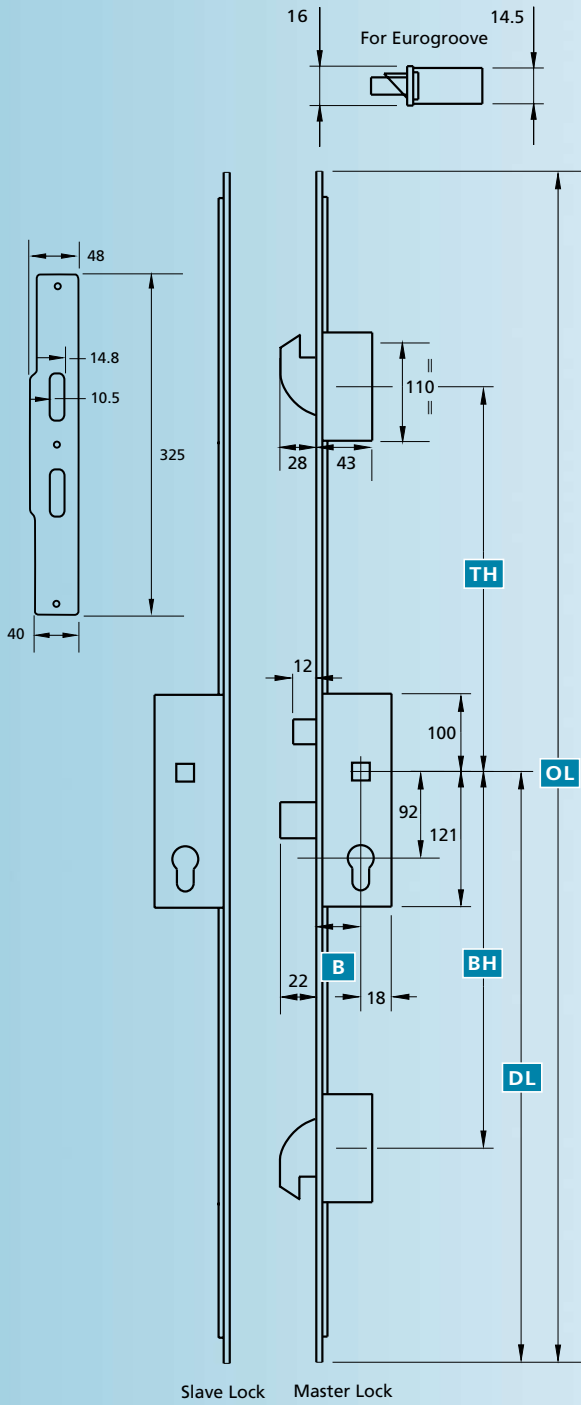

**KEY**

<b>B</b>	Backset	<b>OL</b>	Overall Length	<b>TH</b>	Top Hook
<b>DL</b>	Datum Line	<b>BH</b>	Bottom Hook		

**OPTION 1 (MASTER LOCK)**

B	DL	OL	TH	BH	Part No.	Box Qty
45	1050	1946	376	495	7145-1134-79	5

**OPTION 2 (SLAVE LOCK)**

B	DL	OL	TH	BH	Part No.	Box Qty
45	1050	1946	376	495	7545-1135-79	5

**KEEPS**

Description	Part No.	Box Qty
Double Shoot Bolt Keep	5404-85	50
Non-Adjustable Center Keep	2743-77	"

**OPTIONAL EXTRAS**

Suitable for options 1 & 2 above

B	SHOOT BOLT	MAINTENANCE
45	•	

• Available - See pages 11 - 12 for more details

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

**TECHNICAL INFORMATION**

<b>Corrosion resistance:</b>	Plated to BS EN 1670 Grade 4
<b>Operation:</b>	Function test 100,000 cycles

**MATERIALS**

<b>Lock case:</b>	Steel BZP CR3 Passivate + Seal
<b>Face bar:</b>	SS430
<b>Hooks and dead/sash bolt:</b>	Forged brass satin chrome plate
<b>Center Strike:</b>	Steel Polished Chrome

Diagram illustrates product in locked position.  
Not to scale.

All dimensions are in mm and are nominal.  
ERA Products reserves the right to change specification without notice.