





grouphomesafe▲

CHALLENGER 3D BUTT HINGES HINGE PIN REMOVAL

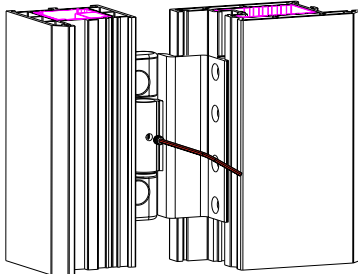


REMOVE THE TOP CAP AND SECURITY SCREW
(USING 2mm ALLEN KEY).




INSERT A 5mm ALLEN KEY INTO THE TOP OF THE
HINGE PIN, LIFT THE END OF THE KEY AND
WAGGLE FROM SIDE TO SIDE. THE HINGE PIN
SHOULD LIFT OUT EASILY.

IF THE HINGE PIN IS STUCK

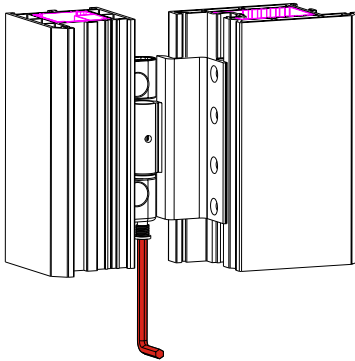

USING A 5mm ALLEN KEY, REMOVE THE VERTICAL
ADJUSTMENT SCREW.

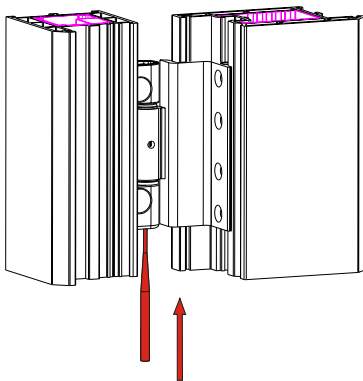

INSERT A 2mm PIN PUNCH INTO THE HOLE IN THE
BOTTOM BUSH AND TAP THE PIN OUT.

Part No.	Description
DAMSOT1000	2mm Allen Key
DAMSOT1002	5mm Allen Key
DAMSOT1003	2mm Pin Punch
DAMSOT1001	4mm Allen Key

ERA
Straight Road, Short Heath, Willenhall,
West Midlands. WV12 5RA
Tel: 01922 490060
Fax: 01922 490044
Email: info@era-security.com